


GreenLine 4000

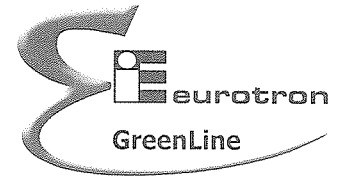

Innovative Instrumentation Solutions
A unit of E instruments Group LLC

Hand-held Industrial Combustion & Emission Analyzer Portable and Rugged Multifunction Unit for Industrial Service & Maintenance

- ▶ **Combustion gas analyzer up to 4 gases**
- ▶ **NO/NO_x & SO₂ emission analyzer**
- ▶ **C_x H_y uncombusted Hydrocarbon**
- ▶ **Draft & differential pressure meter**
- ▶ **2 channel thermometer**
- ▶ **Ambient CO monitor**
- ▶ **Gas velocity with Pitot tube**
- ▶ **Gas leak detector**
- ▶ **Ionization flame tester**
- ▶ **Temperature & Humidity meter**
- ▶ **Gas cooler moisture trap available**

- Built-in impact printer
- Rechargeable battery
- Industrial probe and external GreenCooler unit
- Stores up to 250 samples



O₂

CO₂

CO

NO_x

SO₂

Efficiency

Excess air

Differential pressure

Tair
Tgas

Vgas

Ambient CO monitor

Gas leak detector

T+RH%
probe

Designed to meet BS7927, TUV, ISO, Gastec QA Criteria, GOST, Qualigaz, and UNI 10389

All descriptions are related to a fully optioned instrument. See last page for the different configurations.

GreenLine 4000

Multifunction unit for industrial applications

One instrument with many features

The **NEW** handheld **GreenLine 4000** provides the latest technology in flue gas analysis. One instrument with many features:

- **up to 4 gas sensors;**
- **CO sensor with manual or automatic protection;**
- **built-in impact printer;**
- **water, air, surface temperature measurements;**
- **searching for presence and location of gas leaks;**
- **Differential pressure input for draft and gas velocity measurements;**
- **operator safety with ambient CO continuous monitoring;**
- **ambient temperature and relative humidity measurements.**

Easy replaceable gas sensors

GreenLine 4000 uses long life, low maintenance sensors. Alarm levels with audible buzzer on gases measurement.

CO sensor protection

An automatic device can exclude the CO sensor in presence of high Carbon Monoxide level.

Standard Report of Calibration

Each instrument is factory calibrated and certified against Eurotron Standard to ensure traceability, and shipped with a Report of Calibration.

Rechargeable battery operations

Ni-MH rechargeable batteries provide longer field use. Flue gas analyser and internal printer are powered by the same internal batteries.

Keyboard & Display

Text, menu, and keyboard available in most common languages (not icons) for simple and intuitive operations. Engineering units are selectable by keyboard. The large backlight graphic LCD can display 3, 6 or 12 values per page (ZOOM function) or with bargraph format.

Multi Fuel selection

GreenLine 4000 provides up to 10 fuels for calculating combustion values. Most used fuels for your country are pre-loaded from factory. Other fuels can be added using GasConfig PC software.

Built-in impact printer

The GreenLine 4000 can include an

internal printer. It uses a low cost common roll of paper. Certainly more readable, long time and heat resistant than the thermal printout on chemical paper.

Pressure/Draft input

Differential pressure input to verify: low pressure, draft, gas pipework leak with pressure decay programme, pressure in gas pipework, pressure in combustion chamber, ΔP on filters and fan, pressure switches calibration.

Smoke index

Smoke index measurement is performed by using the optional external hand pump. The results can be stored in the internal memory and printed on the report.

Gas sampling probe

Flue gas sampling probes, with different lengths and shapes, are available to match each specific requirement. The sampling probe is connected to the instrument with a single or dual hose through a water trap and a suspended particle line filter.

Proprietary design trap

Patent pending to inhibit water into the instrument. External, to prevent risk of instrument damage. Large water tank capacity for condensation boiler. Small rubber cup for easy water purge. Long life paper filter.

Combustion air temperature probe

A remote Pt100 probe is available for remote combustion air temperature measurement. This probe is strongly recommended mainly in forced air boiler to obtain an accurate efficiency measurement.

CO ambient monitoring

An external optional probe is available for continuous surveillance of the ambient and operator safety. Both acoustic and visual alarm are available.

Gas leak sniffer

An external probe is available to locate the position of a gas leak. This probe has a flexible stainless steel shaft to reach difficult locations. shaft to reach difficult locations.

T+RH ambient monitoring

An external probe is available for temperature and relative humidity of the ambient for comfort index computation.

Gas velocity

Measure the gas speed using one Pitot tube connected to the differential pressure ports. Different tube lengths are available for different stack diameters. GreenLine 4000 calculate the gas velocity considering the gas density parameter.

Industrial probe & GreenCooler unit

A special sampling probe is available for industrial high temperature applications. This probe can be used connected to an external gas conditioning unit (see related bulletins). This compact unit cools the gas sample to dry it. The cooler unit is strongly recommended for SO₂ and NO₂ long terms measurements.

GreenCooler Compact

The plug-in module it is used to reduce the gas temperature to prolong sensor life. The cooler uses solid-state Peltier technology for cooling, causing the moisture to quickly drop out into a trap. Water will be drained automatically with a compact peristaltic pump. A more sophisticated sampling system, with a Heated tube, is available with the standard GreenCooler or built-in in GreenLine 8000.

Flash memory

The flash memory allows the instrument to be configured by updating the GreenLine firmware for any future legislation requirement or product performance upgrading.

APPLICATIONS

- ☛ **Boilers**
Utility & Power plants
Industrial boilers
- ☛ **Heaters & Dryers**
Paint, Textile, Food, Paper, Rubber, etc.
Process heaters
- ☛ **Kilns / Furnaces**
Cement, Lime, Glass, Ceramic
- ☛ **Stationary internal combustion engines**
Gas compression
UPS power cogeneration
Oil fired pumping station
- ☛ **Turbines**
- ☛ **Chemical analysis laboratory**
Fuel additive
- ☛ **CEM backup & maintenance**
- ☛ **ISO 14000**
Auditing, Compliance

Specifications

- **Type:** palm-top combustion gas analyser with 1, 2, 3 or 4 gas sensors.
- **Calibration:** automatic calibration procedure at instrument switch-On.
- **Self-diagnosis:** Sensors efficiency test with diagnostic messages.
- **Fuel types:** Up to 10 selectable from keyboard.
- **Power supply:** High capacity Ni-MH rechargeable battery pack / external battery charger.
- **Charging time:** 8h at 90% with instrument Off.
- **Battery life:** 6 hours (typical) continuous use (without printing and backlight).
- **Printer:** Internal impact type 24 columns with 58 mm paper roll.
- **Printer power supply:** from the analyser battery pack.
- **Print autonomy:** up to 40 reports with full battery (typical).
- **Service and user information:** 3 programmable lines.
- **Printed report header:** 4 programmable lines
- **Display:** 40x58 mm graphic LCD with backlight device.
- **Pump:** 1.4 l/m @ 100 mbar
- **Flue gas probes:** stainless steel shaft with incorporated temperature sensor.
- **Memory:** up to 250 full analysis data structured by boilers (Tags).
- **Serial communication:** IR serial port. Optional IR/RS232 serial interface adapter.
- **Operating temperature:** from -5°C to +45°C (23 to 113°F)
- **Storage temperature:** from -20 to +60°C (-4 to 140°F) 3 months maximum at temperatures exceeding the operational limits.
- **Dimensions and Weight:** 115x90x330 mm (4.53"x3.54"x13") - 1.1 kg (38.8lbs) with battery and printer

Parameter	Sensor	Range	Resol.	Accuracy
O ₂	Electrochemical	0 - 25%	0.1%	±0.1% vol
CO	Electrochemical	0 - 8000 ppm <i>H2 <2000ppm comp.</i>	1 ppm	±10 ppm <300 ppm ±4% up to 2000 ppm ±10% >2000 ppm
CO	Electrochemical	0 - 20000 ppm	1 ppm	±10 ppm <300 ppm ±4% up to 2000 ppm ±10% >2000 ppm
NO	Electrochemical	0 - 4000 ppm	1 ppm	±5 ppm <125 ppm ±4% up to 4000 ppm
NO ₂	Electrochemical	0 - 1000 ppm	1 ppm	±5 ppm <125 ppm ±4% up to 1000 ppm
NO _x	Calculated	0 - 5000 ppm	1 ppm	
SO ₂	Electrochemical	0 - 4000 ppm	1 ppm	±5 ppm <125 ppm ±4% up to 4000 ppm
CO ₂	Calculated	0 - 99.9%	0.1%	
C _x H _y	Pellistor	0 - 5%	0.01%	±5% F.S.
T _{air}	Pt100	-10 - 99.9°C 14.0 - 212.0°F	0.1°C 0.2°F	±(0.2% rdg + 0.15°C) ±(0.2% rdg + 0.3°F)
T _{gas}	Tc K	0 - 999.9°C 32.0 - 1830°F	0.1°C 0.2°F	±(0.3% rdg + 0.3°C) ±(0.3% rdg + 0.6°F)
ΔT	Calculated	0 - 999.9°C 32.0 - 1830°F	0.1°C 0.2°F	
T _{fl_{ov}}	Tc K	-10 - 99.9°C 14.0 - 212.0°F	0.1°C 0.2°F	±(0.3% rdg + 0.3°C) ±(0.3% rdg + 0.6°F)
T _{return}	Tc K	-10 - 99.9°C 14.0 - 212.0°F	0.1°C 0.2°F	±(0.3% rdg + 0.3°C) ±(0.3% rdg + 0.6°F)
Pressure/Draft	Bridge	±100.00hPa	1hPa	±3Pa < 300Pa ±1% rdg. >300Pa
Excess air	Calculated	1.00 - infinity	0.01	
Gas Velocity	Calculated	0 - 99.9 m/s	0.1 m/s	
Efficiency	Calculated	1 - 99.9%	0.1%	
Smoke index		0 - 9 Bacharach		

* NO_x concentration can be shown in terms of stack equivalent NO₂.
 Relative Accuracy limits are stated as absolute or % of reading with reference to the ambient temperature range from -5°C to 40°C (23 to 104°F). Additional ± 1 digit error has to be considered.
 The pressure relative accuracy shown is valid only after the autozero procedure.
 All emissions measurements are available also with a programmable O₂ reference value.
 Measuring reading can be directly converted from ppm to mg/Nm³ mg/kWh, from hPa to mmH₂O, mbar, inH₂O and from °C to °F.


CONSUMABLE PARTS

- EE340005 Paper roll
- EE490002 Printer ribbon
- EE650074 Filter for EE650076 water trap
- EE650011 40 pcs. Filters for Smoke index measurements

DBGas 2000 - Gas Analysis Database Manager

GreenLine 4000 can store 250 readings structured by Tags. Using the optional **DBGas2000 Windows™** software package, you can organize and manage your inspection and maintenance activity.


DBGas 2000 software package includes **GasConfig Windows™** software. With this software you can modify the configuration of the instrument.

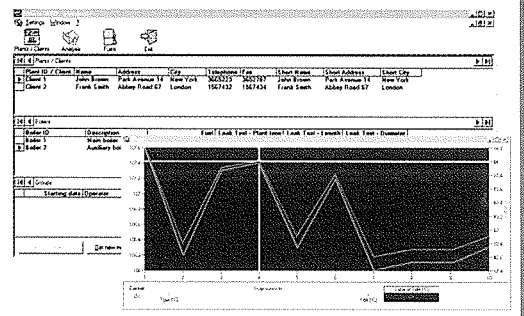

GreenLine 4000

Fully configurable unit for the complete flue gas analysis

Accessories




BB880028
ABS rigid carrying case.
BB880033
Aluminium carrying case.
BB880043
Compact rigid carrying case with shoulder strap. GreenLine 4000, probes, and accessories need 1/3 of the classic carrying case space.




BB610046
ø8mm (0.3") - 300mm (11.8") length (TGD - Temperature, Gas, Draft) sampling probe with 930°F maximum operating temperature.



EE300088
Single hose burner pressure probe.



F7828000
Manual pump for smoke index measurements



BB830006
Pt100 remote air sensor with positioning cone




F2139000
Pipe Velcro Tc type K



F2132100
130mm air Tc type K



F2137100
130mm Contact type K Tc

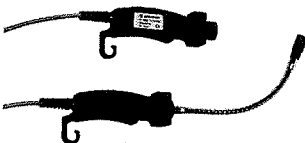

BB830009
Ambient CO probe
BB830008
Ambient T+RH% probe
BB830010
Gas sniffer probe



BB610032
300mm (11.8") Pitot tube
BB610033
750mm (29.5") Pitot Tube
BB610034
1000mm (39.4") Pitot Tube
(requires option E=2H)

Ordering Code

cat. 7824 - A - B - C C - D - E - F - G - H

Table A Sensor n.1
0 none
1 O₂ (0-25%)

Table B Sensor n.2
0 none
2 CO (0-8000 ppm) + auto/manual sensor exclusion
2X CO (0-20000 ppm) + auto/manual sensor exclusion
2Y CO (0-10 %)

Table C Sensor 3/4
0 none
4 NO (0-4000 ppm) / NO_x (Sensor 3 only)
5 NO₂ (0-1000 ppm)
6 SO₂ (0-4000 ppm)
8 C_xH_y (0-5%) (Sensor 4 only)

Table D Sample probes (including water trap and line filter)
0 none
2 300mm (11.8") flue probe + draft (dual hose) BB610046 (max 500°C / 930°F)
5D 750mm (29.5") flue probe + draft (dual hose) BB610080 (max 500°C / 930°F)
5X 750mm (29.5") flue probe (single hose) BB610081 (max 1000°C / 1830°F)
8 750mm (29.5") flue probe (single hose without Tc) BB610082 (max 1200°C / 2190°F)
F Sintered filter mouted on top (max. 800°C / 1470°F)

Table E Options
0 none
1 Built-in impact printer
2H Draft / differential pressure input with n.2 E300088 hoses
4 Graphic display capability (bargraph)

Table F Mains adapter / charger
1 115V ±10% 50/60Hz - USA plug
2 230V ±10% 50/60Hz - Schuko plug
3 230V ±10% 50/60Hz - UK plug
4 230V ±10% 50/60Hz - European plug
5 100V ±10% 50/60Hz - USA/Japan plug

Table G Accessories
0 None
1 Software GasConfig + DBGas2000 + IR/RS232 adapter
2 Magnetic support
3V Vinyl case with shoulder strap
3 ABS carrying case
4 Aluminum carrying case
5 Remote combustion air temp. sensor with 2m cable
8 External probe for CO operator safety
9 External probe for gas leak detector
B Manual pump for smoke index measurement with filters and comparison table
C External probe for ambient temperature and relative umidity
D External probe for boiler ionization current
E 300mm (11.8") Pitot tube for gas velocity measurements (only with E=2H)

Table H Report of calibration
1 Eurotron report

NON-CONTRACT DOCUMENT - SUBJECT TO CHANGE
PDS / U / 202 / 0203



Contact Esys for more information about this product:
Esys® The Energy Control Company™
4520 Stine Road, Ste 7
Bakersfield, CA 93313
(661) 833-1902

email: esys@esys.us
website: <http://www.esys.us>

