




The Model 2M02 provides local indication of the 4 to 20mA output or input signal to the Fiber Optic Transmitter or Receiver (FOT/FOR). The LED meter displays this process control signal to one decimal place of resolution.

Connections to the 2M02 meter vary slightly depending on whether it will be used in conjunction with the FOT or FOR end of the fiber optic link. When ordering, please indicate to which FOT/FOR model the 2M02 will be connected.

SPECIFICATIONS

Mechanical

- Mounting: 35mm DIN Rail
Weight/Unit: < 9oz (250g)
Case Material: Plastic (UL94V-0)

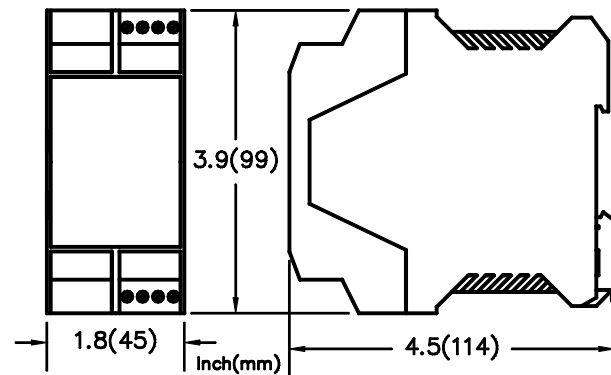

- Power Requirements: Operating power is supplied from the mated FOT or FOR via the interconnection bus
- Accuracy: $\pm 0.2\text{mA}$
- Ambient Conditions: -20°C to 70°C Operational
0 to 95% Relative Humidity, Non-Condensing

